



CEILING ABSORBER

DATA SHEET T50 / T100 / T150

ABSORPTION



Horizontal installation example

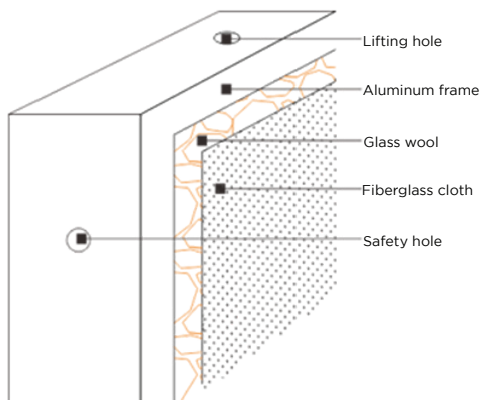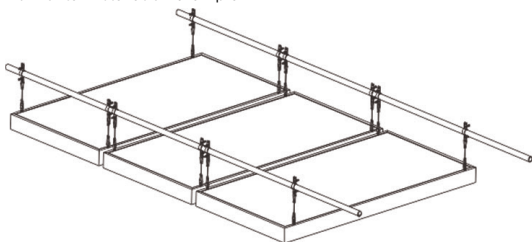

APPLICATION:

Controlling the reverberation time in large spaces such as stadiums, sports halls and auditoriums.

PRODUCT FEATURES:

Easy mounting system, ECO-friendly, flame retardant and moisture-proof.

FIRE PROTECTION PERFORMANCE:

Grade A

ENVIRONMENTALLY FRIENDLY BASE MATERIALS

≤0.4mg/L formaldehyde emission, meets International EO standards.

STRUCTURE:

Lightweight aluminium alloy frame, glass wool, covered with fibreglass and flame-retardant/non-inflammable acoustic felt.


FINISH:

Non-inflamable acoustic fabric

COLOR OPTIONS:



BLACK



WHITE



BEIGE

SIZE:

T50 - 1200mm (L) x 600mm (W) x 50mm (T), 5.5kg/m²

T100 - 1200mm (L) x 600mm (W) x 100mm (T), 11.5kg/m²

T150 - 1200mm (L) x 600mm (W) x 150mm (T), 13.5kg/m²

or ≤W600 x L4000 x T50/100/150mm

ABSORPTION COEFFICIENT:

