

ABSORPTION

PROPERTIES: LOW FREQUENCY ABSORPTION

APPLICATION:

Controlling the standing waves in HI-Fi listening rooms, home theaters, recording and broadcasting studios and other critical listening environments. Enjoy a clear low frequency reproduction of your system, without overhauling your room.

PRODUCT FEATURES:

With a high tensile inorganic coating, these corner bass traps are durable and effective at absorbing low-frequency standing waves. Paired with other DQ modules, they form full spectrum acoustic treatment for your critical listening environment.

ENVIRONMENTALLY FRIENDLY BASE MATERIALS

Zero formaldehyde emission by International E0 standards.

BASE MATERIAL:

High molecular polymer

ACOUSTIC STRUCTURE:

High tensile inorganic coating with light polymer materials, open resonance box, effective in capturing low frequencies between 100-250Hz. Standard anti-oxidization and anti-resonance treated aluminum fixing system

FINISH:


Eco-friendly (E0) water based paint

SIZE & WEIGHT:

C300W - 1200mm (H) x 300mm (W) x 300mm (T), ≤2.8 kg/pc

C350W - 1200mm (H) x 350mm (W) x 350mm (T), ≤3.2 kg/pc

ABSORPTION COEFFICIENT:

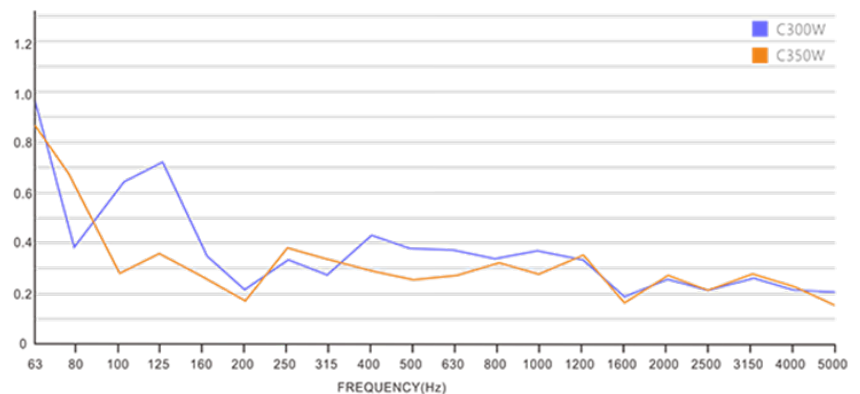

AVAILABLE COLORS:

