




CEILING ABSORBER

DATA SHEET T50X / T100X / T150X

ABSORPTION

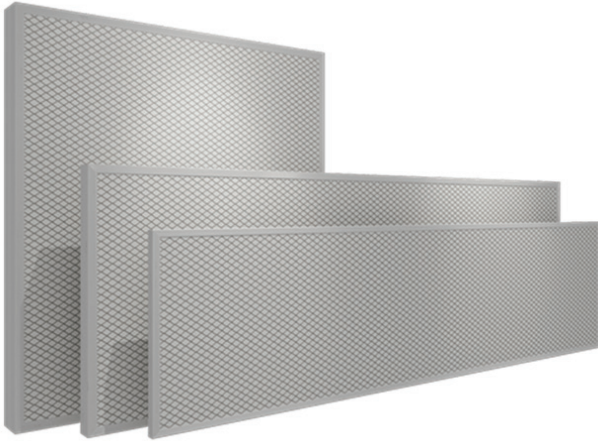

Vertical installation example

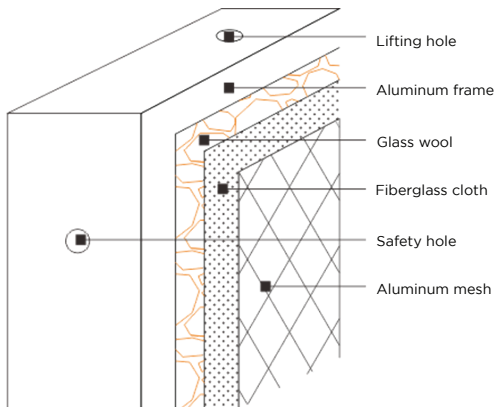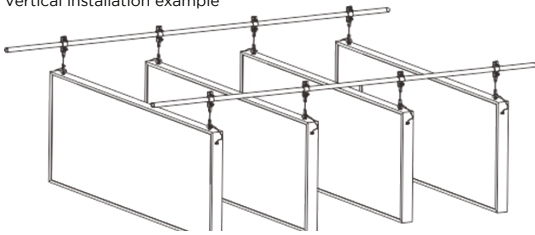

APPLICATION:

Controlling the reverberation time in large spaces such as stadiums, sports halls and auditoriums.

PRODUCT FEATURES:

Easy mounting system, ECO-friendly, flame retardant and moisture-proof, with protective aluminium mesh.

FIRE PROTECTION PERFORMANCE:

Grade A

ENVIRONMENTALLY FRIENDLY BASE MATERIALS

≤0.4mg/L formaldehyde emission, meets International EO standards.

STRUCTURE:

Lightweight aluminium alloy frame, glass wool, covered with fibreglass and flame-retardant/non-inflammable acoustic felt, protective aluminium mesh.

FINISH:

Non-inflamable acoustic fabric

COLOR OPTIONS:



SIZE & WEIGHT:

T50X - 1200mm (L) x 600mm (W) x 50mm (T), 7kg/m²
 T100X - 1200mm (L) x 600mm (W) x 100mm (T), 13kg/m²
 T150X - 1200mm (L) x 600mm (W) x 150mm (T), 15kg/m²
 or ≤W600 x L4000 x T50/100/150mm

ABSORPTION COEFFICIENT:

